

# Emergency Exit & Egress

SPECIALIZED APPLICATION

**Maximum brightness, unrivaled efficiency.**

Designed specifically for 48 VDC applications. For solar, wind, storage battery, etc. applications, **eliminates the need for inverters to provide AC power which decreases power usage by 20% to 30%.**

Exit sign with rugged design, and 2 adjustable bright LED lamps providing egress illumination. Can be mounted in any orientation, walls or ceilings.

**FEATURES**


- UL 924, NEC, OSHA and NFPA 101 Life Safety Code
- All LED light! No SLA batteries, uses long lasting NiCads that are very low maintenance
- Rated for Damp Locations
- Fully adjustable 1.5W LED lamp heads each equipped with 12 series-parallel white LEDs
- Universal mounting canopy for top installation or flush mount to wall
- Lightweight with snap-together construction for easy installation
- LED status indicator
- Injection molded, impact- and scratch-resistant, corrosion-proof, UL 94 V-0 flame retardant housing
- Push-to-test switch

**Certifications:**

UL Listed for damp locations  
Meets UL924, NFPA 101 Life Safety Code, NEC & OSHA codes



Part Number:  
**EEXIT2**

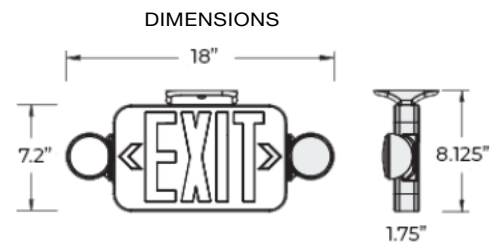

SPECIFICATIONS	
Power Consumption	3 Watts
Luminous Flux	150 Lumens
Beam Angle	Adjustable
Dimming	NO DIMMING
Housing Color	White
Fixture Material	Flame Retardant Thermoplastic
Operating Temperature	-4 degrees F (-20 C) to +122 degrees F (+50 C)
Expected Lifespan	100,000 hours (L70)
Warranty	10 years
Input Voltage	48VDC
Standards/Certifications	Made in USA, ETL Listed, RoHS, CE
Suitable Uses	Indoors - Dry Locations - SEALED OPTION AVAILABLE

CERTIFICATIONS:

